



PX703HDH - 1080P HOME THEATER PROJECTOR WITH 3500 LUMENS AND LOW INPUT LAG

Key Features

• High brightness 3500 Lumens 1080p projector with shorter throw and advanced visual features


• 1.3x optical zoom, and vertical keystone for flexible setup

• Exclusive Color technology offers a wide color gamut for beautiful image production in nearly any environment

• A low 16ms input latency provides faster frame-by-frame action for smooth images without delay

• Supports most media players, gaming consoles, PCs, Macs, and mobile devices with inputs such as HDMI, USB, Mini USB



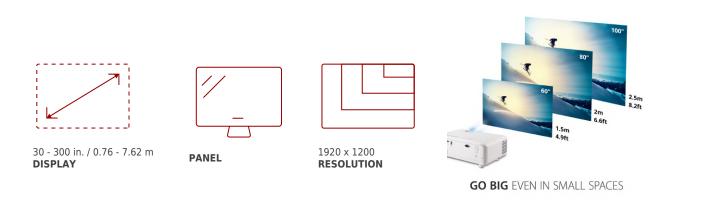

Product **Description**

For an incredible audiovisual experience at a great value, the ViewSonic PX703HDH projector delivers. Perfect for home entertainment, this projector features 3500 lumens, Full HD 1920x1080 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment, while a 10W speaker delivers incredibly clear and audible sound. An ultra-low input latency provides faster frame-by-frame action, while a Sports Mode feature delivers stunning detail so you can enjoy fast-action sports on the big screen. Full HD 3D compatibility lets you enjoy 3D movies and games. What's more, an energy-

saving SuperEco[®] feature reduces power consumption and extends the lamp life by up to 15,000 hours.* With a shorter throw ratio, 1.3x optical zoom, smart design, and extensive connectivity, the PX703HDH provides flexible and quick set-up in any home.

Specifications

More Information	
UPC	766907016765
Light Source	DLP Lamp
Display Resolution	Full HD (1920x1080)
Display Resolution	1920 x 1080
Brightness (Lumens)	3,500 ANSI
Screen Size	30 - 300 in. / 0.76 - 7.62 m
Throw Distance	2.4 - 32 ft
Throw Ratio	1.13-1.47
Keystone	Vertical (+/- 40°)
Lens	1.3x optical zoom
Light Source (watt)	203
Light Source Life, Normal (hours)	5000
Light Source Life, SuperEco (hours)	20000
Color Depth	1.07 Billion Colors
Dynamic Contrast Ratio	12,000:1
Aspect Ratio	16:9
Input Lag	37ms
Frequency Horizontal	15K~102KHz
Frequency Vertical	23-120Hz
PC Resolution (max)	1920 x 1200
PC Resolution (min)	640 x 480
Mac [®] Resolution (max)	1920 x 1200
Mac [®] Resolution (min)	640 x 480
USB 2.0 Type A	1
3.5mm Audio Out	1
3.5mm Audio In	1
Control (RS232)	1
HDMI 1.4 (with HDCP 1.4)	2
Mini USB	1
Micro USB	1
Internal Speakers	10W (x1)
Voltage	100-240V+/- 10%, 50/60Hz AC
Consumption (typical)	300W

Stand-by	<0.5W
Physical Controls	Keypad, Power key
On Screen Display	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
Temperature	32-95º F (0 - 35º C)
Kensington Lock Slot	1
Net (lbs)	5.8
Gross (lbs)	8.3
Net (kg)	2.6
Gross (kg)	3.8
Packaging (in.)	16.3 × 6.6 × 11.7
Physical (in.)	12.2 x 8.7 x 4.4
Packaging (mm)	415.0 x 168.0 x 297.0
Physical (mm)	312.0 x 222.0 x 108.0
Regulations	cTUVus
Package Contents	PX703HDH projector, power cable, remote control, Quick Start Guide
Warranty	Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange ® service. (One year Express Exchange Service requires product registration).
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
UPC: 766907016765	

