



## VX1655 - 15.6" 1080P PORTABLE MONITOR WITH 60W USB C AND MINI HDMI

## Key Features

• 15.6 Inch FHD (1920x1080p) LED portable gaming monitor with 60Hz refresh rate and protective case


• With a weight of 1.7 lbs and a thickness of 0.8 in, this portable monitor slips easily into backpacks and purses

• USB-C connectivity for fast data, audio and video transfer, and 2 way powered 60W USB C charging.

Comes with a built-in stand with an integrated tripod mount

• The VX1655 supports laptops, PCs, and Apple/Mac operating systems and more with Mini-HDMI, and USB-C inputs



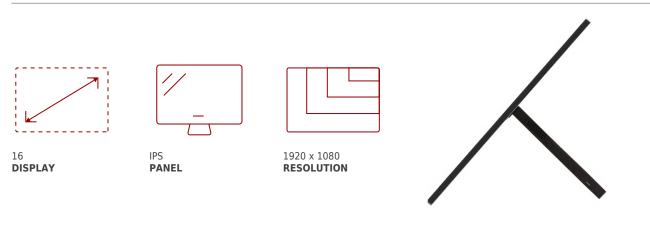

## Product **Description**

The ViewSonic<sup>®</sup> VX1655 is a 15.6" portable monitor with 1080p resolution for incredible visual performance on the go. An ultra-thin panel with the hardware integrated into the kickstand provides incredible stability, discreetly hides cable connectivity, and still allows for use in portrait and landscape modes. A convenient tripod mount is integrated into the stand for additional versatility. In addition, versatile connectivity options include two USB-C ports for 2-way charging, as well as mini-HDMI and a headphone jack. Measuring less than an inch thick and weighing under two pounds, the ultra-slim VX1655 perfectly fits into any bag, briefcase, or backpack so you can work wherever life takes you.

## Specifications

More Information

UPC

766907022728

Screen Size	16
Viewable Area (in.)	15.6
Panel Type	IPS
<b>Display Resolution</b>	1920 x 1080
<b>Display Resolution</b>	Full HD (1920x1080)
Static Contrast Ratio	800:1
Dynamic Contrast Ratio	80,000,000:1
Brightness	250 cd/m2
Colors	262K
Color Space Support	6 bit true
Aspect Ratio	16:9
Response Time (Typical GTG)	4ms
Viewing Angles	170º horizontal, 170º vertical
Backlight Life (Hours)	15,000
Panel Surface	Glossy
Refresh Rate	60Hz
PC Resolution (max)	1920 x 1080
Mac® Resolution (max)	1920 x 1080
USB Type C	60W x 2
3.5mm Audio Out	1
Mini HDMI 1.4	1
Internal Speakers	0.8W (×2)
Eco Mode (Conserve)	7w
Eco Mode (optimized)	8w
Consumption (typical)	11w
Consumption (max)	10w
Stand-by	0.5w
Power Supply	External
Cable Organization	No
<b>Physical Controls</b>	Up, Right, Down, Left, Power
On Screen Display	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu
Temperature	32-104º F (0 - 40º C)
Humidity (non-condensing)	20-90%
Frequency Horizontal	mini HDMI 1.4: 15 ~ 82 KHz   USB Type C: 23 ~ 83 KHz
Frequency Vertical	mini HDMI 1.4: 48 ~ 60 Hz   USB Type C: 48 ~ 60 Hz
Tilt (Forward/Back)	0º - 86º

Net (lbs)	1.7
Gross (lbs)	4
Net (kg)	0.77
Gross (kg)	1.8
Packaging (in.)	16.5 x 15.5 x 3.0
Physical (in.)	14.0 x 8.8 x 0.8
Packaging (mm)	418.0 x 393.0 x 77.0
Physical (mm)	355.0 x 224.0 x 21.0
Regulations	cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Silver, CEC, NOM, Mexico Energy
Package Contents	LCD Display, mini HDM Ito HDMI Cable, USB type-C to type-C cable, Cover, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Warranty	Three-year limited warranty on parts, labor and backlight
UPC: 766907022728	

